






REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDRNO:1090623-1A	HARLEN	2009.10.15
B	ECN NO.:S121109	YF	2014.03.28

NOTES:

1. WATERPROOF RATE: IP67
2. ELECTRICAL CHARACTERISTICS
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
TEMPERATURE RANGE: -40°C TO +100°C
CURRENT RATING: 10A
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR ONE MINUTE
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS
6. FOR PANEL THICKNESS MAX OF 4.0mm



RECOMMENDED PANEL CUT-OUT

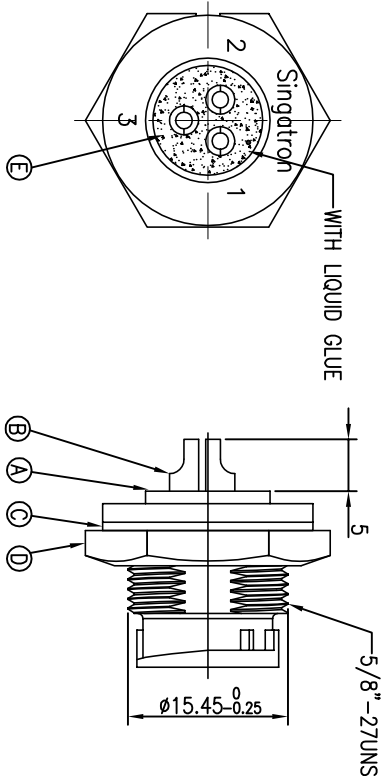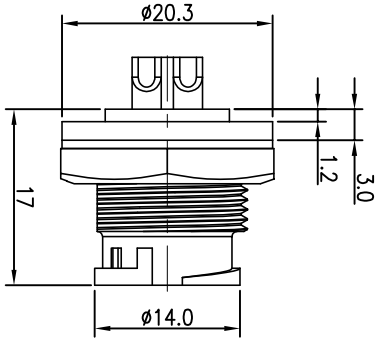

PIN ASSIGNMENTS
FRONT VIEW

E	LIQUID GLUE	1	N/A	BLACK
D	NUT	1	NYLON+GF	BLACK
C	GASKET	1	EPDM	BLACK
B	FEMALE PIN	3	Phosphor Bronze Alloy	1u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES: TITLE CIRCULAR STANDARD SIZE (SOLDER/LOCK TYPE)				
X	:±0.5	X	:±2°	DMN YF PART NO.2CT3014-W03400
XX	:±0.3	XX	:±1°	CHKD Harlen SCALE 2:1 UNIT: mm
XX	:±0.2			APVD Quon SIZE: A3 SHEET:1 OF 1 REV: B

CUSTOMER COPY

Singatron Enterprise Co., Ltd.
信昌企業股份有限公司